

8000 series

Rim Type (8000R & F8000R)

Specifications



LISTED

1.5 HOUR FIRE RATED

ANSI A156.3 G2



Material	Pushbar- Steel pressed, stainless steel pressed or aluminum pressed Head Cover – Zinc alloy Spring – Stainless steel
Latch Bolt	3/4" throw , deadlocking design
Strike	For 5/8" stop, plus shim for 1/2" stop
Projection	Pushbar Neutral: 2-3/16"(55mm) Pushbar Depressed: 1-7/8"(47mm)
Reversible	Non-handed, reversible for all functions and trims
For Door	1-3/4" thick of wood or metal door
Door Width	3' standard for door width of 27" to 36", 4' standard for door width of 39" to 48"
Stile	4-1/4" minimum. 3-3/8" for narrow stile
Mounting Height	40-5/16" from CL to finished floor recommended
Mounting Fasteners	Furnished standard with sheet metal & machine screws or SNB as option
Cylinders	For trim, knob, lever & thumb-piece type
Dogging	1/4 turn, hex key dogging on non-fire labeled device
UL Listed	For "Panic Hardware" and "UL". Labeled (1.5 hours) fire exit hardware
Operation	Inside by slight pressure on any point of the push bar all time



Drawings & Dimensions


Optional

Head cover for wide stile door

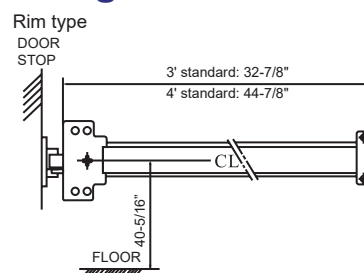


Mounting Position


Door Application Chart

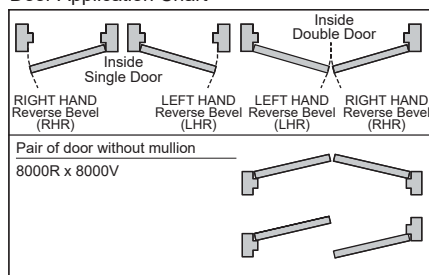


A : For wide stile door



N : For narrow stile offset



E : For narrow stile centered



Model	Actual Length	Minimum	Door Size
3' standard	32-7/8" (836mm)	27" (685mm)	35" to 36" door width
4' standard	44-7/8" (1141mm)	39" (990mm)	47" to 48" door width

UL fire-rated unavailable