

C514



Product Features

- Adjustable power size 2~4
- Adjustable closing & latching speed
- Adjustable back check
- Thermo-constant valve
- Surface mount
- Rack & Pinion
- Standard arm

Application Ranges


- Standard door mount on pull side
- Transom mount on push side
- Parallel bracket mount on size 2~4

Power size	2			3			4		
	Interior	Exterior swing out swing in		Interior	Exterior swing out swing in		Interior	Exterior swing out swing in	
Max Door width [Inches (mm)]	36 (914)	32-1/64 (813)	28 (711)	42 (1067)	6 (914)	32-1/64 (813)	48 (1219)	42 (1067)	36 (914)
Max. Opening Angle	180								


Finishes

- Painted – silver, brown, gold, black, white & other RAL colors upon request & discussion


Dimensions

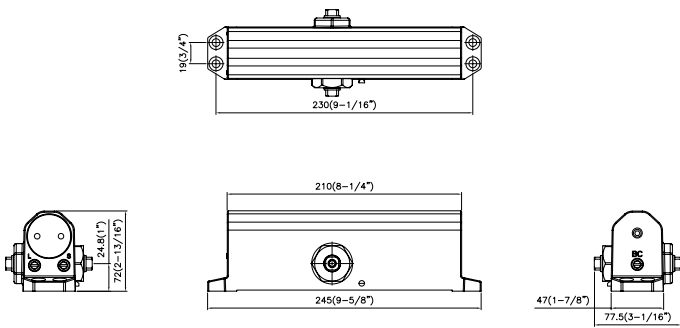

Accessories

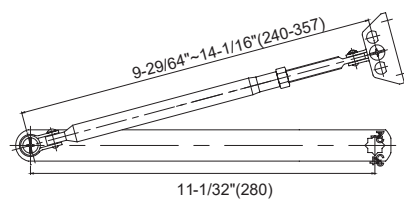


- ZAR-A044**
- Standard arm
 - Non-handed
 - UL Certified




- ZPA-K04**
- Parallel bracket
 - UL Certified


Options

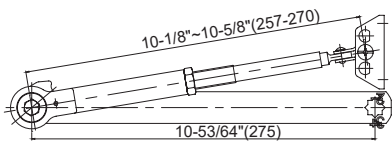


- ZAR-B054**
- Hold-open arm
 - Non-handed



- ZMO-K05**
- Mounting plate



- ZMO-K15**
- Drop plate



- ZCO-K03**
- Plastic Cover
 - Non-handed