

C68V



Product Features

- Selectable position power size EN 2~4
- Adjustable closing & latching speed
- Thermo-constant valve
- Adjustable back check (optional upon request)
- Surface mount
- Rack & pinion
- Standard arm mechanism
- Single-action door
- Non-handed installation

Power size	2~4
Max. Door width (mm)	1100
Max. Opening Angle	180


Application Ranges

- Standard door mount on pull side
- Transom mount on push side ★
- Parallel bracket mount on size 3

Finishes


- Painted – silver, brown, gold, black, white & other RAL colors upon request & discussion
- Plating (for cover only) - US finish code colors upon request & discussion

Dimensions

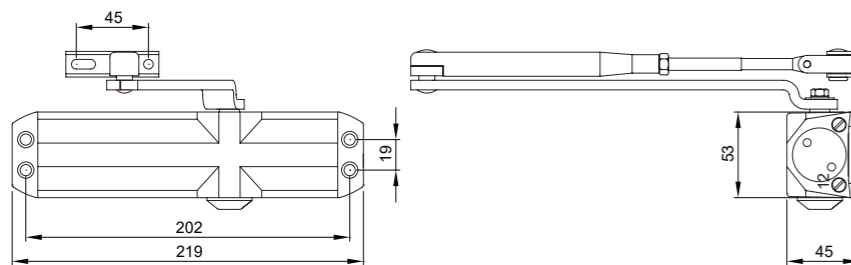


★ This option is not covered by the Certificate

Accessories

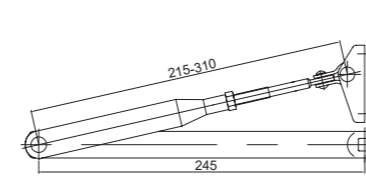

ZAR-A028


- Standard arm
- Non-handed
- EN Certified



ZPA-H01


- Parallel bracket
- EN Certified

Options




ZAR-A083

- Flat arm
- Non-handed
- EN Certified




ZAR-B020

- Hold-open arm
- Non-handed

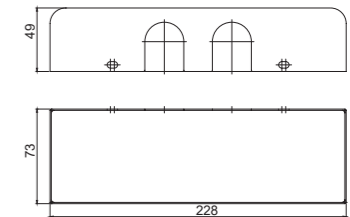

ZCO-C45

- Metal cover (steel)
- Non-handed



ZCO-C46

- Metal cover (stainless steel)
- Non-handed