

SDC

Surface mounted Door Coordinator




Certificate
2812-CPR-AF5001



Product Features

- Door closers with cam action system with integrated mechanical door coordinator for double leaf doors
- Mechanical door coordinator in continuous guide track
- All components fully integrated into continuous guide track
- In combination with carry bar installed on inactive leaf at push side to ensure the correct sequence of door closing
- In combination with cam action door closers to fulfill barrier free building requirements (DDA)
- For fire and smoke protection doors with hinge distance from 1350 to 2500 mm

Dimensions

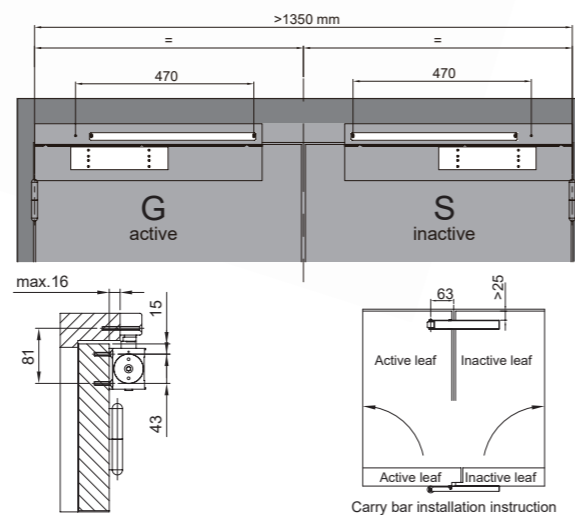

- G : Active leaf, the first opening and last closing leaf of a rebated single swing double door set
- S : Inactive leaf, the last opening and first closing leaf of a rebated single swing double door set

Application Ranges

- Standard door mounted on pull side
- Can be used for left and right handed doors

Finishes

Painted - Silver


Accessories

Carry bar : ZSCR-W103




T93P SDC EHO G

Standard door mount pull side and EHO in active door

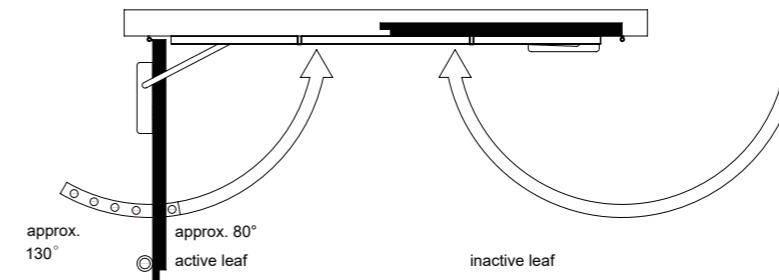


T93P SDC EHO 2

Standard door mount pull side and EHO in both active and inactive door

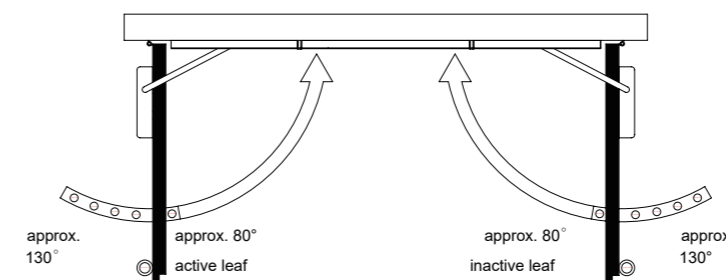

T93P SDC EHO S

Standard door mount pull side and EHO in inactive door

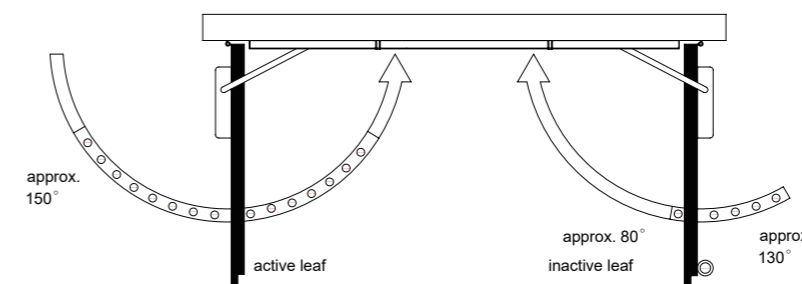

Test of T93P Series

	T93P-B type	T93P-G type	T93P-B EHO	T93P-G EHO	T93P SDC (Pull side)	T93P SDC EHO (Pull side)
Single leaf door	V	V	V	V		
Double leaf door					V	V
EN1154	V	V	V	V	V	V
EN1155			V	V		V
EN1158					V	V
EN1634	V	V	V	V	V	V
D.A.S. NF S 61937-1			V	V		V