SDC

Surface mounted Door Coordinator

Certificate:
BS EN 1158 : 1997
BS EN1634-1:2014

Product Features:

- Door closers with cam action system with integrated mechanical door coordinator for double leaf doors
- Certified in compliance with EN1158, power size 3-5
- Mechanical door coordinator in continuous guide track
- All components fully integrated into continuous guide track
- In combination with carry bar installed on inactive leaf at push side to ensure the correct sequence of door closing
- In combination with cam action door closers to fulfill barrier free building requirements (DDA)
- For fire and smoke protection doors with hinge distance from 1350 to 2500 mm

Technical data	SDC
Hinge distance	1350-2500 mm
Fire and smoke protection	Yes
Height	32.5 mm
Depth	32 mm
Length	Up to hinge distance
Certified in compliance with	EN 1158
CE mark	Yes

Application Ranges:

- Standard door mounted on pull side
- Can be used for left and right handed doors

Finishes:

- Painted - Silver

Accessories:

- Carry bar (Standard accessory)

Dimensions:

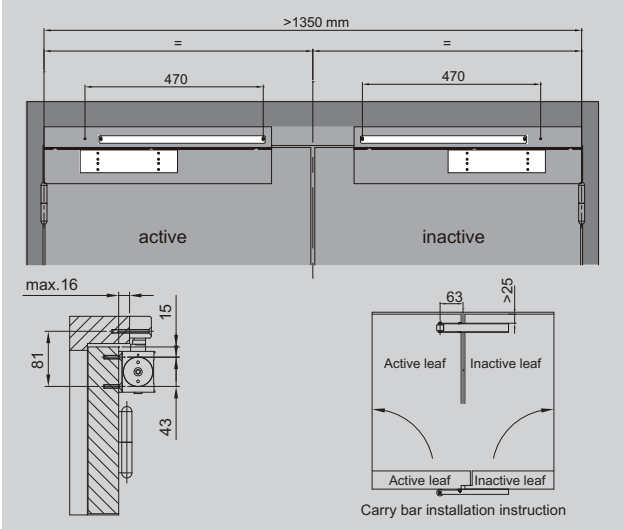

Carry bar installation instruction