

# T72V



## Product Features

- Selectable position power size EN 2~4
- Adjustable closing & latching speed
- Adjustable back check
- Thermo-constant valve
- Surface mount
- Rack & pinion
- Standard arm
- Single-action door
- Non-handed installation

Power size	2~4
Max. Door width (mm)	1100
Max. Opening Angle	180


## Application Ranges

- Standard door mount on pull side
- Transom mount on push side
- Parallel bracket mount on size 3


## Finishes

- Anodized aluminum for door closer body as standard
- Painted – silver, brown, gold, black, white & other RAL colors upon request & discussion
- Plating (for cover only) - US finish code colors upon request & discussion

## Dimensions

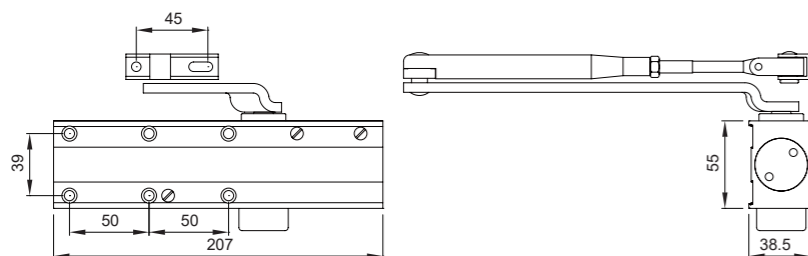


## Accessories

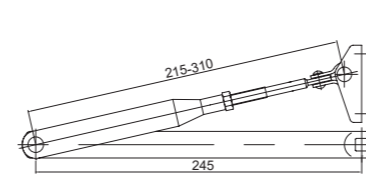

### ZAR-A028


- Standard arm
- Non-handed
- EN Certified



### ZPA-H01


- Parallel bracket
- EN Certified

## Options




### ZAR-A083

- Flat arm
- Non-handed
- EN Certified

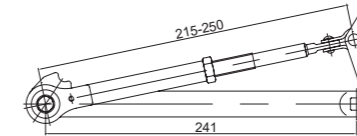


### ZAR-B045

- Hold-open arm
- Non-handed

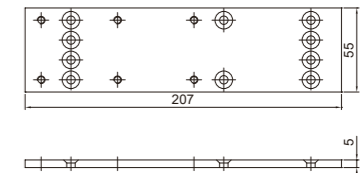


### ZMO-E25

- Mounting plate




### ZMO-E15

- Drop plate



### ZCO-C45

- Metal cover (steel)
- Non-handed



### ZCO-C46

- Metal cover (stainless steel)
- Non-handed