

# T81J



## Product Features

- Adjustable power size EN 2~6
- Adjustable closing & latching speed
- Adjustable back check
- Adjustable delay action (optional upon request) ★
- Thermo-constant valve
- Surface mount
- Rack & pinion
- Standard arm
- Single-action door
- Non-handed installation

Power size	2~6
Max. Door width (mm)	1400
Max. Opening Angle	180


## Application Ranges

- Standard door mount on pull side
- Transom mount on push side ★
- Parallel bracket mount on size 3~5

## Finishes


- Anodized aluminum for door closer body and track rail as standard
- Painted – silver, brown, gold, black, white & other RAL colors upon request & discussion
- Plating (for cover only) - US finish code colors upon request & discussion

## Dimensions

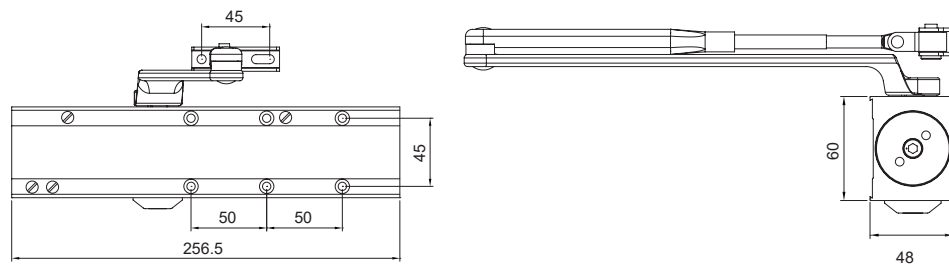


★ This option is not covered by the Certificate

## Accessories



### ZAR-A086


- Standard arm
- Non-handed
- EN Certified



### ZPA-H01


- Parallel bracket
- EN Certified

## Options




### ZAR-A084

- Flat arm
- Non-handed
- EN Certified

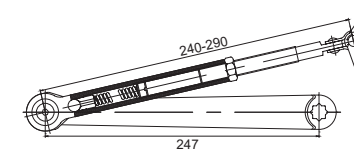


### ZAR-B089

- Hold-open arm
- Non-handed

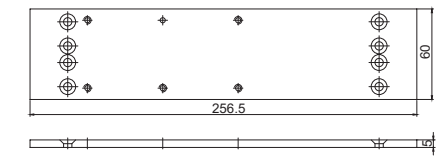


### ZMO-C65

- Mounting plate




### ZMO-C75

- Drop plate



### ZCO-C75

- Metal cover (steel)
- Non-handed



### ZCO-C76

- Metal cover (stainless steel)
- Non-handed