

T83G (T834)



Product Features

- Adjustable power size EN 2~4
- Adjustable closing & latching speed
- Adjustable back check
- Thermo-constant valve
- Surface mount
- Rack & pinion
- Standard arm
- Single-action door
- Non-handed installation

Power size	2~4
Max. Door width (mm)	1100
Max. Opening Angle	180


Application Ranges

- Standard door mount on pull side
- Transom mount on push side
- Parallel bracket mount on size 3~4


Finishes

- Anodized aluminum for door closer body as standard
- Painted – silver, brown, gold, black, white & other RAL colors upon request & discussion
- Plating (for cover only) - US finish code colors upon request & discussion


Dimensions

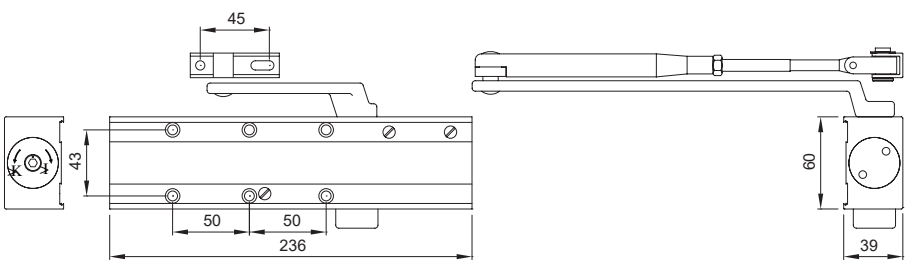

Accessories

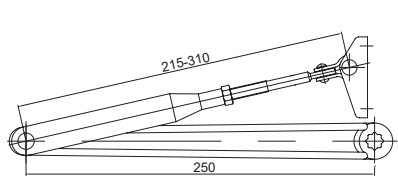


- ZAR-A005**
- Standard arm
 - Non-handed
 - EN Certified




- ZPA-H01**
- Parallel bracket
 - EN Certified


Options




- ZAR-A083**
- Flat arm
 - Non-handed
 - EN Certified

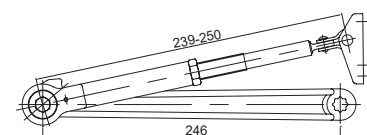


- ZAR-B048**
- Hold-open arm
 - Non-handed

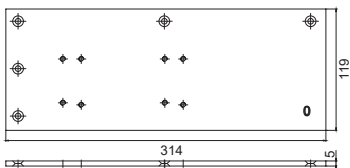

- ZMO-C75**
- Drop plate



- ZCO-C25**
- Metal cover (steel)
 - Non-handed



- ZCO-C26**
- Metal cover (stainless steel)
 - Non-handed