

T83H



Product Features

- Adjustable power size EN 2~5
- Adjustable closing & latching speed
- Adjustable back check
- Thermo-constant valve
- Surface mount
- Rack & pinion
- Standard arm
- Single-action door
- Non-handed installation

Power size	2~5
Max. Door width (mm)	1250
Max. Opening Angle	180


Application Ranges

- Standard door mount on pull side
- Transom mount on push side ★
- Parallel bracket mount on size 3~4

Finishes


- Anodized aluminum for door closer body as standard
- Painted – silver, brown, gold, black, white & other RAL colors upon request & discussion
- Plating (for cover only) - US finish code colors upon request & discussion

Dimensions

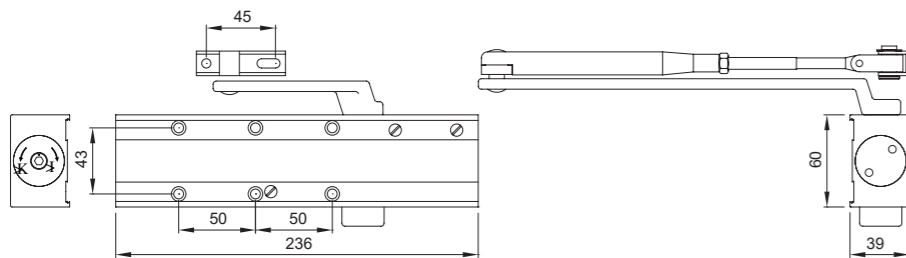


★ This option is not covered by the Certificate

Accessories

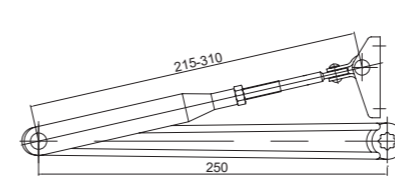

ZAR-A005


- Standard arm
- Non-handed
- EN Certified



ZPA-H01


- Parallel bracket
- EN Certified

Options




ZAR-A083

- Flat arm
- Non-handed
- EN Certified

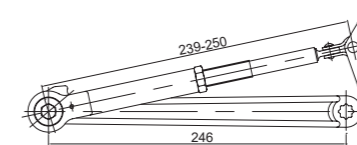


ZAR-B048

- Hold-open arm
- Non-handed

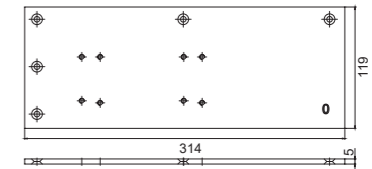


ZMO-C75

- Drop plate



ZCO-C25

- Metal cover (steel)
- Non-handed



ZCO-C26

- Metal cover (stainless steel)
- Non-handed