

T8AM

Electromagnetic Free Swing



Product Features

- Adjustable power size EN 3~6
- Adjustable closing & latching speed
- Swing Free
- Electromagnetic Hold Open
- Surface mount
- Rack & pinion
- Standard arm
- Single-action door
- Non-handed installation

Power size	3~6
Max. Door width (mm)	1400
Max. Opening Angle	180 ★

★ Door opening up to 180° requires min.30 mm pivot offset at the hinges.


Application Ranges

- Standard door mount on pull side
 - Transom mount on push side ★
 - Parallel bracket mount on size 3~5
- This option is not covered by the Certificate


Finishes

- Painted – silver
- US32D


Dimensions

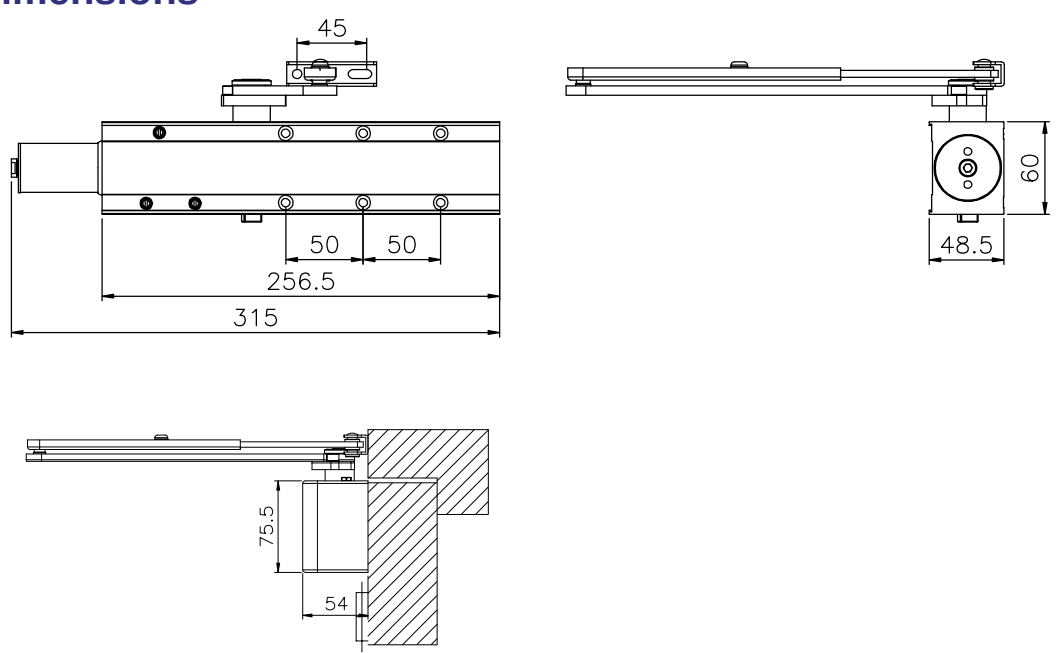


Accessories

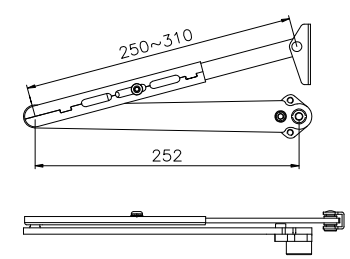

- ZAR-A221
- Standard arm
 - Non-handed
 - EN Certified



- ZPA-H01
- Parallel bracket
 - EN Certified



- ZCO-CB5
- Metal cover (steel)
 - Non-handed
- ZCO-CB6
- Metal cover (stainless steel)
 - Non-handed