

T96GX



Product Features

- Adjustable power size EN 2~4
- Adjustable closing & latching speed
- Thermo-constant valve
- Concealed mount
- Cam action
- Track arm (Large as standard & Small as option)
- Single-action door
- Non-handed installation
- Compatible with Fortress electromagnetic hold-open application (EHO)
- T96G can be installed in virtually all doors with minimum thickness of 40mm or more


Power size	2~4
Max. Door width (mm)	1100
Max. Opening Angle	120

Application Ranges


- Concealed in door
- Concealed in transom

Installation

- Concealed in door

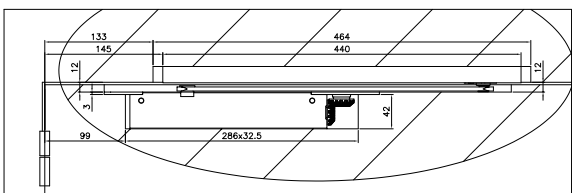


- Concealed in transom

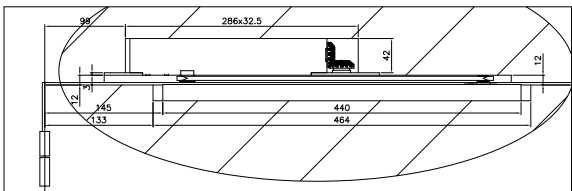


Finishes

- Anodized aluminum for door closer body and track rail as standard
- Painted – silver, brown, gold, black, white & other RAL colors upon request & discussion


Dimensions

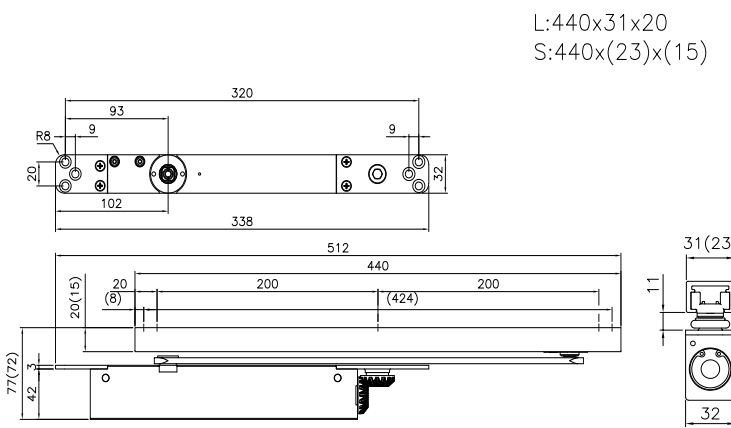

Accessories




- ZAR-I150 (large)**
- Track arm & rail- punched arm
 - EN Certified




- ZSCR-T136**
- End cap
 - For track arm & rail: ZAR-I150 (large)


Options




- ZAR-I145 (small)**
- Track arm & rail- punched arm
 - Zinc alloy block (Patent #: M566248)
 - EN certified




- ZAR-I219/I222 (large/small)**
- Track arm & rail - counter-bore arm
 - Zinc alloy block
 - EN certified




- ZSCR-T012**
- End cap
 - For track arm & rail: ZAR-I145 (small)




- ZSCR-T156**
- Track bracket
 - For track arm & rail: ZAR-I145 (small)
 - For steel door




- ZSCR-T126**
- Hold-open device
 - For track arm & rail: ZAR-I150 (large)



- ZSCR-T116**
- Hold-open device
 - Zinc alloy block (Patent #: M566248)
 - For track arm & rail: ZAR-I145 (small)



- ZSCR-T111**
- Cushion
 - For track arm & rail: ZAR-I150 (large)



- ZSCR-T109**
- Cushion
 - For track arm & rail: ZAR-I145 (small)