

7100 series

Alarm Kit

Features


1. Alarm kit contains an internal horn and LED light, when the push bar is depressed, the LED light will blink and horn will siren to provide a visible/audible means of signaling that the opening has been violated.
2. The alarm kit can be armed or disarmed by key.
3. Alarm siren time may be adjust to 1,3,5 and infinite minutes.
4. The key switch uses a standard 1 1/4" cylinder with S keyway.
5. Device includes "EMERGENCY EXIT ONLY.ALARM WILL SOUND" decal for application on door or push bar.

Note





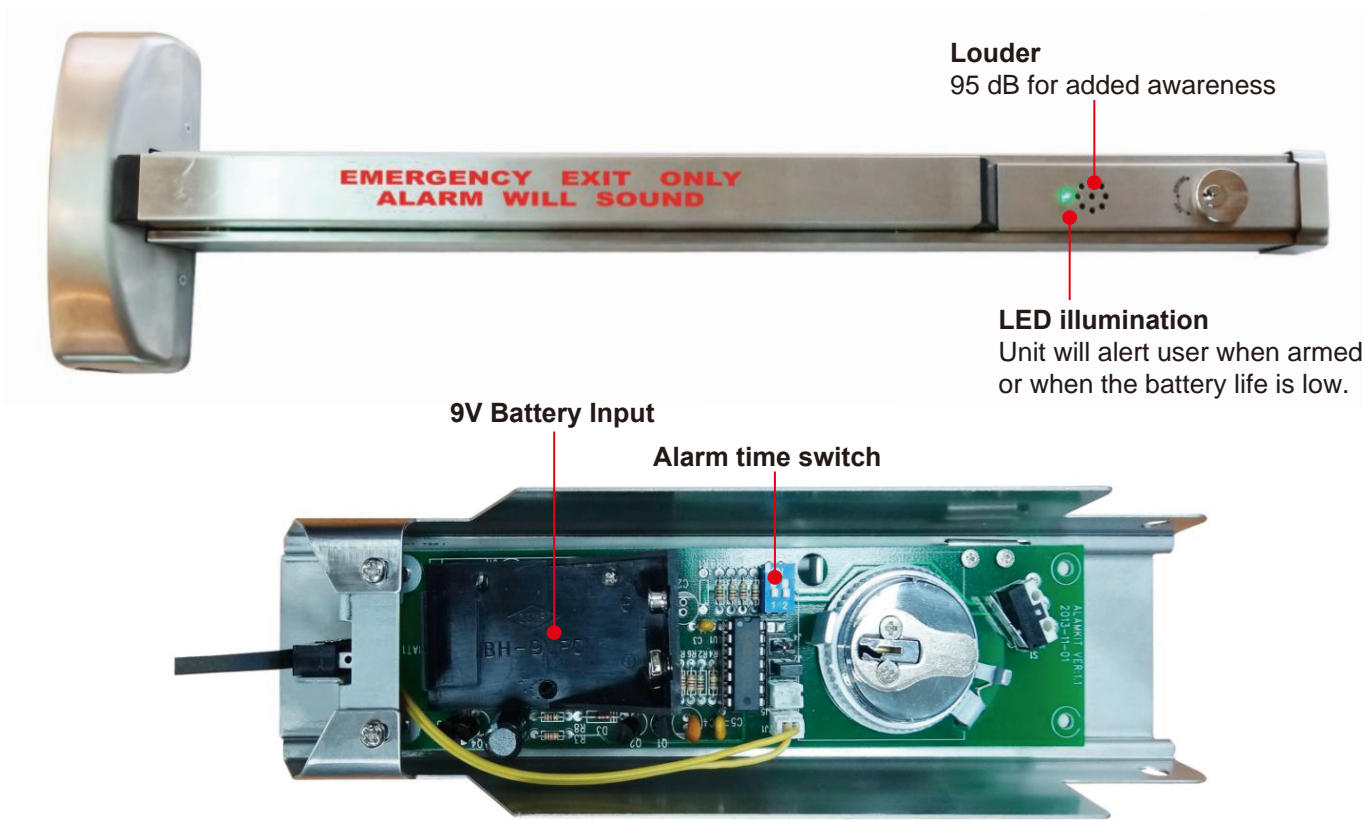

1. If alarm siren time is set to infinite minutes, alarm will sound until battery runs out.
2. Siren will beep and red LED will blink at approximately 8 second intervals when battery is low.

Operating Instructions

1. Insert the key into the cylinder and turn counterclockwise to arm the unit.
2. The siren will sound three short beeps indicating the unit is armed.
3. Depress the push bar, the alarm should sound immediately and red/green LED light will blink.
4. Turn the key clockwise to disarm.



7100 series Selection Guide

TRIM STYLE	CODE NUMBER	FUNCTION	DESCRIPTION
	2U40 2U50	Dummy Storeroom	Pull trim, night latch
	2P 40 2P 50	Dummy Storeroom	Pull trim, night latch
	72BL30 72BL40 72BL50 72BL80 72BL50/80 C 72BL50/80 IC 72BL50/80 ICC	Passage Dummy Storeroom Classroom Storeroom/classroom, Clutch Storeroom/classroom, IC, less core (6/7 pin cores with BEST) Storeroom/classroom, IC, less core (6/7 pin cores with BEST),Clutch	Escutcheon lever trim
	80K 30 80K 40 80K 50 80K 80 80K 50/80 IC 80K 50/80 ICC	Passage Dummy Storeroom Classroom Storeroom/classroom, IC, less core (6/7 pin cores with BEST) Storeroom/classroom, IC, less core (6/7 pin cores with BEST),Clutch	Knob trim
	80L30 80L40 80L50 80L80 80L50/80 C 80L50/80 IC 80L50/80 ICC	Passage Dummy Storeroom Classroom Storeroom/classroom, Clutch Storeroom/classroom, IC, less core (6/7 pin cores with BEST) Storeroom/classroom, IC, less core (6/7 pin cores with BEST),Clutch	Lever trim
	80TP30 80TP40 80TP50 80TP80 80TP50/80 IC	Passage Dummy Storeroom Classroom Storeroom/classroom, IC, less core (6/7 pin cores with BEST)	Thumbpiece trim or w/o thumbpiece

Strike Selection



Accessories



Finishes

US32D (or other available finishes upon request & discussion)